

DUSTRON SERIES

Welding / Grinding / Sanding Booth



The Industry Leader in "Push-Pull" Regain Air

High Capture Velocity

Other dust booths depend on air suction velocity of only 140 FPM, while a regain air booth can generate positive velocities of over 400 FPM. The Dustron's fully adjustable Regain Air System provides working area velocities of 400/800 FPM. The timer-controlled, automatic self-cleaning system consisting of solenoids, dump valves, a programmable logic controller (PLC) and blow-down pipes assures that the booth maintains consistent capture velocity.

Efficient, Quiet Operation

Low speed, high flow blowers have airfoil blades for high fan efficiency as well as low noise. Noise levels are also minimized with sound-insulated blower chamber, ductwork and Regain Air plenum.

Ultra-Efficiency Nanofiber Filters

Rated at MERV 15 efficiency, the Dustron's nanofiber cartridge filters operate at a 40-60% lower pressure drop than traditional cartridge medias, resulting in lower energy consumption and a longer filter life. Cartridges are vertically oriented to provide even, full-capacity filter loading and cleaning. The pulse filter cleaning system uses a solid-state programmable logic controller (PLC) to provide reliability and flexibility.

Enhancing the Work Environment

Noise Control

Solid Construction: Standard booth built with 18 gauge steel walls and ceiling. **High-Density Insulation:** Sound-absorbing mats of two-inch fiberglass compressed to one inch applied to inside surfaces of booth. **Outer Layer:** Further enhancement of sound attenuation with 5 mil. aluminized vinyl impregnated fiberglass cloth covering of mat with Class 2 fire-retardant treatment.

Visibility

Integral Lighting: Sealed and gasketed dust-tight fluorescent lights. **Clean Air Curtain:** Clean, filtered air from the Regain Air plenum pushes contaminants away from the breathing zone, providing improved visibility as well as promoting comfort and health.



1-800-289-0189

FILTER 1

CUSTOM SPECIALISTS FOR INDUSTRIAL NEEDS

Dust Control Booths

DUSTRON SERIES

The 99.9% Efficient Dust Collector Booth



Standard Specifications

Cartridge Size.....	12.75" Dia. X 30" Long
Cartridge Area.....	Each Cartridge 250 ft ²
Gauge of Dust Collector Cabinet.....	12-14 ga. Carbon Steel
Gauge of Booth	18 ga. Galv. Carbon Steel
Blower Motor	208-230/460/60/3 TEFC
Number of Valves.....	1 per 2 Cartridges
Face Velocity Created by Suction.....	150 FPM
Face Velocity Created by Regain Air.....	400/800 FPM
Regain Air.....	Adjustable from 0-50%
Dust Drawer Capacity.....	3 ft ³
Lighting.....	4 ft Sealed Fluorescent
Number of Light Fixtures	8'-2, 10'-3, 12'-4, 16'-6, 24'-7, 30'-8
Compressed Air Required.....	60 PSIG Clean, Dry Air
Motor Starter.....	Included
Filter Media.....	Ultra-Efficiency Nanofiber Media
Filter Cleaning System.....	By Solid-State PLC
Sound Control	Fiberglass Compressed and Quilted w/ 5 mil. Aluminized Vinyl- Impregnated Fiberglass Cloth Cover w/ U.L. Class 2 Fire- Retardant Treatment
Finish	Industrial Blue Enamel


MODEL	HxLxW*	FILTERS-SQ FT	HP
DB-8-12-7.5	90" X 8' X 8'	12 - 3000	7.5
DB-10-14-7.5	90" X 8' X 10'	14 - 3500	7.5
DB-12-18-15	90" X 8' X 12'	18 - 4500	15
DB-16-24-2x7.5	90" X 8' X 16'	24 - 6000	2x7.5
DB-20-28-2x7.5	90" X 8' X 20'	28 - 7000	2x7.5
DB-24-36-2x15	90" X 8' X 24'	36 - 9000	2x15
DB-30-42-3x7.5	90" X 8' X 30'	42 - 10500	3x7.5

*Up to 70' Wide: Consult Factory for Custom Dimensions

Filter 1 has a policy of continuous design improvement and reserves the right to update designs and specifications without notice.

Options

- Auger / Vacutron Dust Removal
- High-temperature Cut-Off
- Texas Twister™ Spark Trap
- VFC For Soft-Start and Low Velocity During Cleaning
- Unlimited Width and Depth
- Crane Slot
- Open Top
- Removable Top
- Tilt-Up Top
- HEPA After Filters
- Carbon After Filters

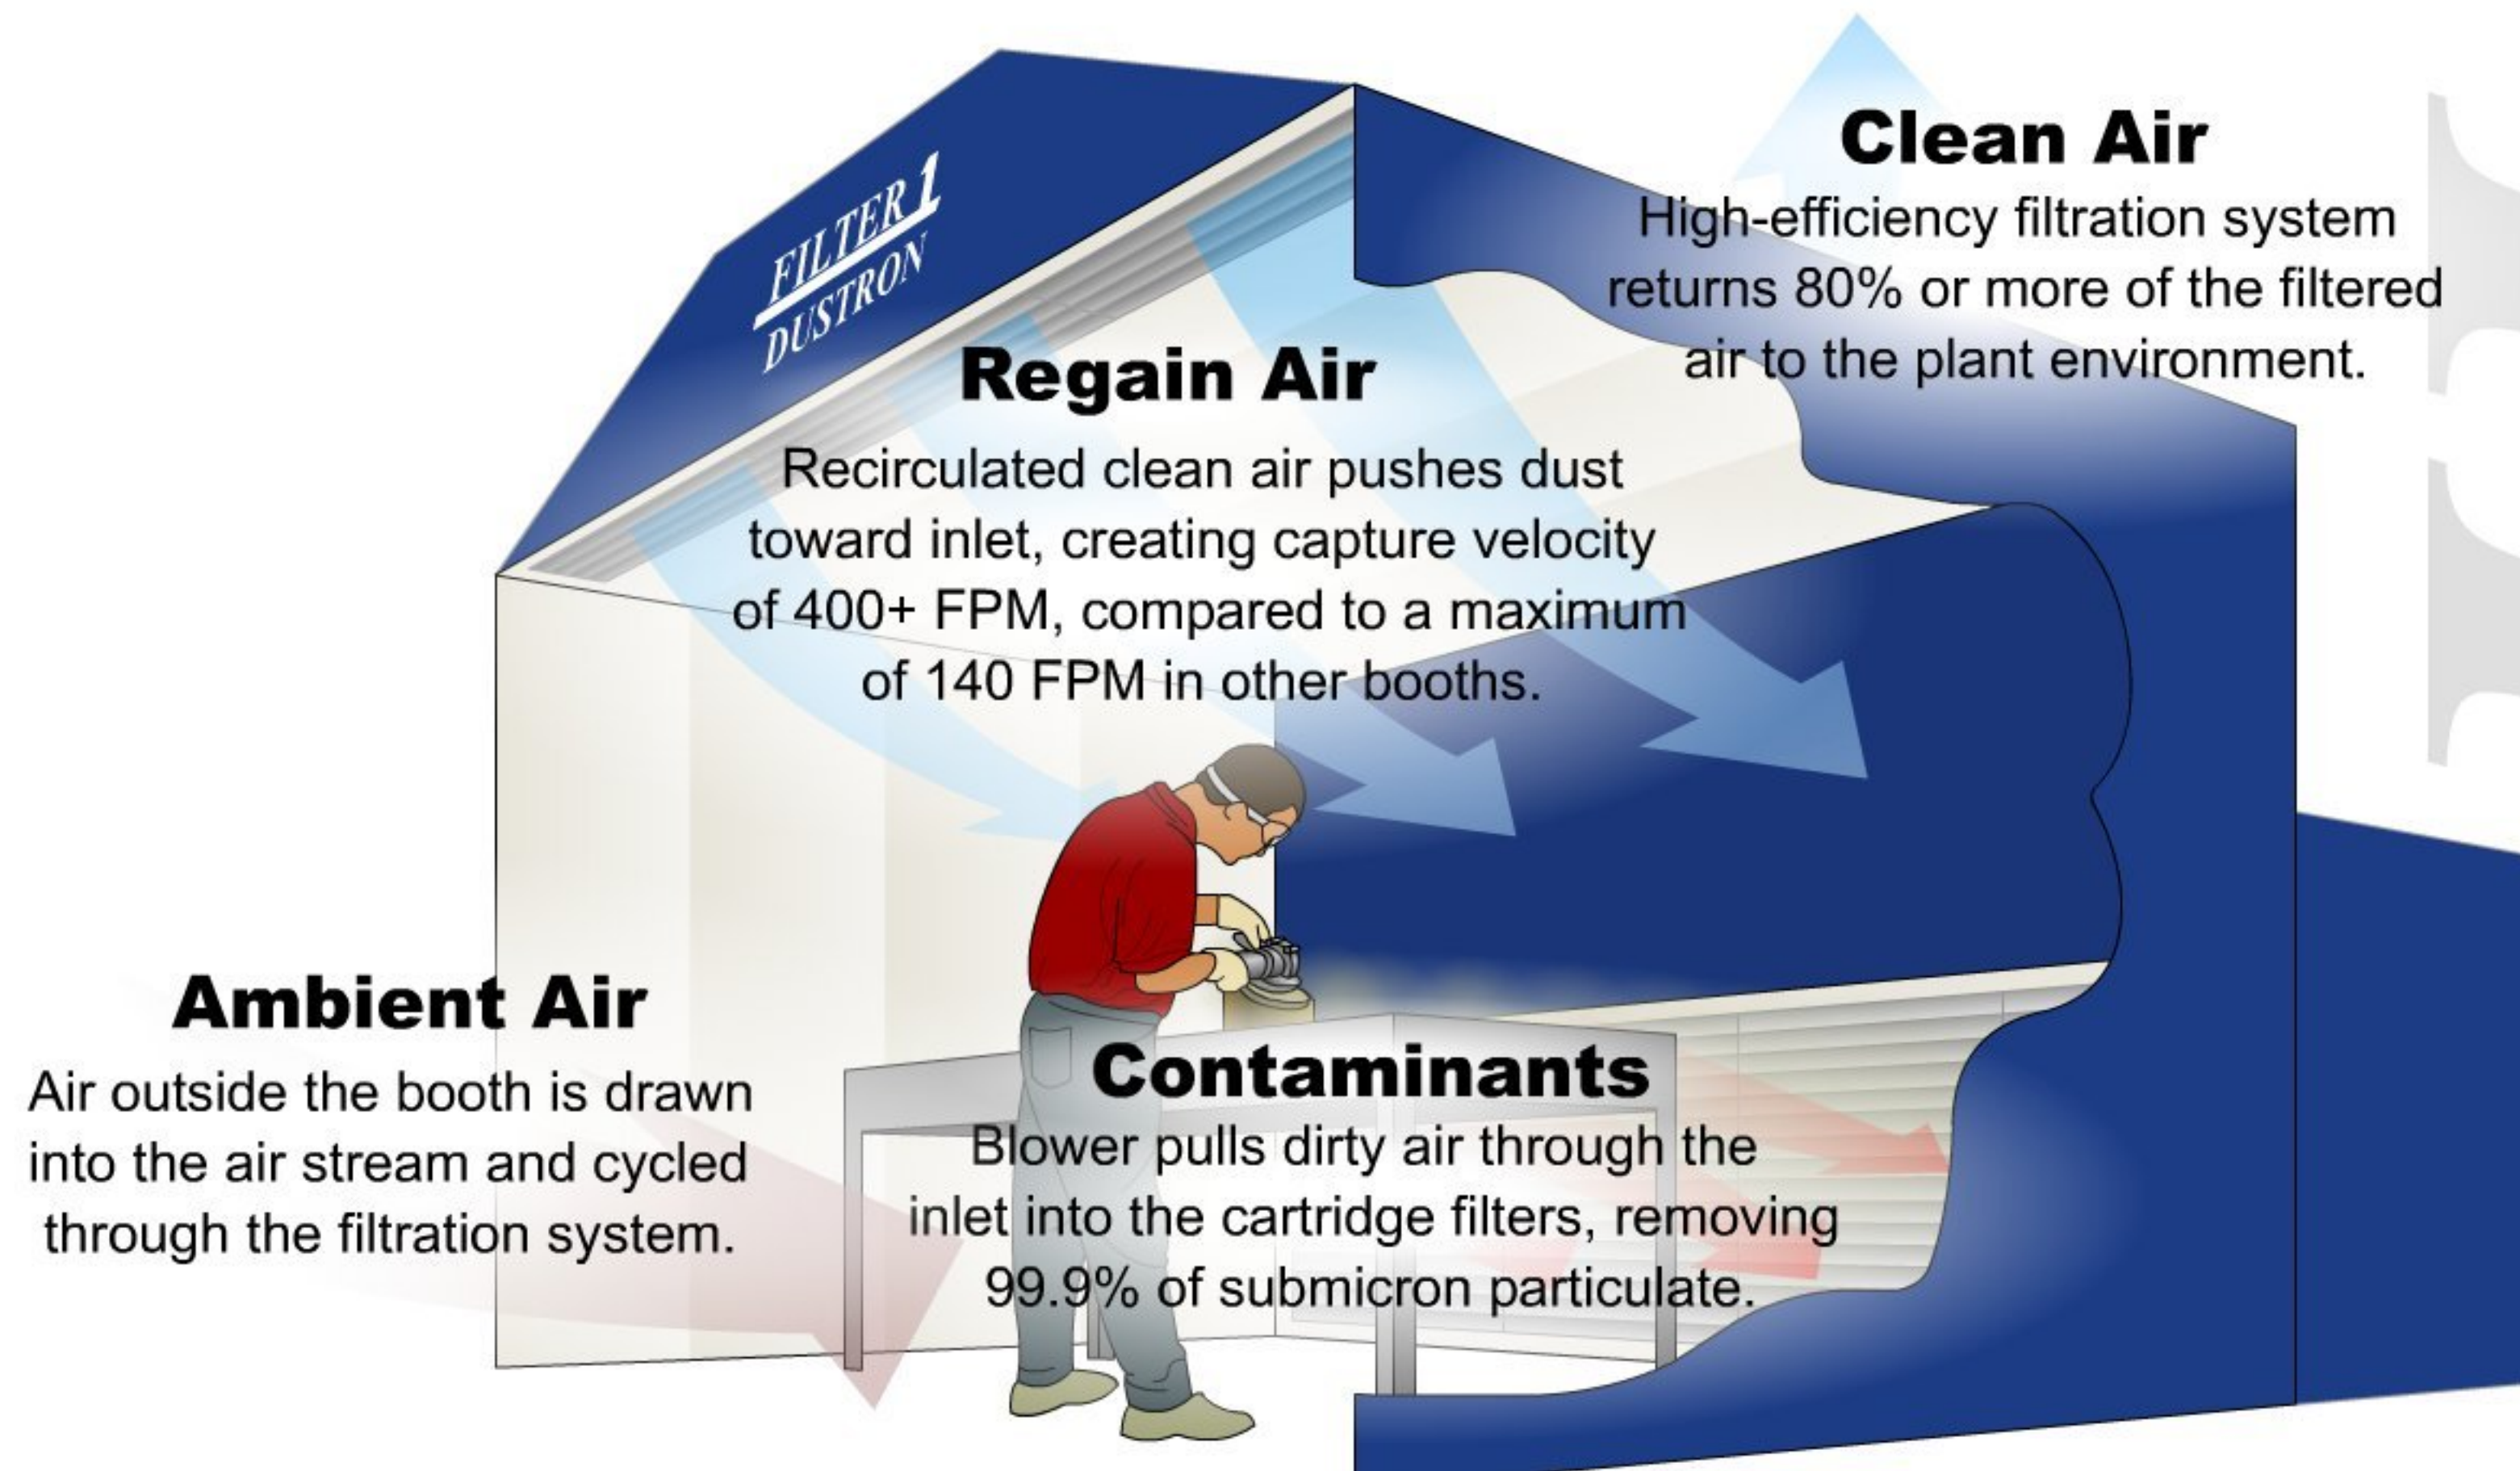

FILTER 1

2525 National Dr.
Garland, TX 75041
972-278-2664
info@filter-1.com

WWW.FILTER-1.COM